Royal Lee Construction Solutions | Office Renovation Pack

Prepared: March 27, 2026

Project: Office Renovation - Steven Bunch
Jobsite: 522 Vermont St, Quincy, IL
Scope: Demo + replace drywall, ceiling grid, base, repaint
Note: This package is based on provided sketches and measurements.
Pricing basis: Existing material stack retained from the prior package, with only missing allowances added.

Floor Area Summary

First Floor: 383.9 sq ft
Second Floor: 263.3 sq ft
Total: 647.2 sq ft

Dimension Schedule (Owner Provided)

First Floor

- A: 13' 4 3/4" (overall interior width)
- B: 28' 3 1/2"
- C: 8' 4"
- D: 10' 0"
- E: 14' 4 7/8"
- F: 6' 9 1/2"
- G: 8 3/4" (bump-out)
- H: 13' 10 1/2"
- I: 12' 11 1/2"

Second Floor

- A: 13' 11"
- B: 10' 4 3/4"
- C: 8' 4"
- D: 10' 7"
- E: 7' 0"
- F: 9' 7 1/4"
- G: 16 3/8"
- H: 11' 1 3/8"
- I: 9' 4"
- J: 13' 8 1/2"
- K: 11' 11"
- L: 12' 0"
- M: 13' 8 1/4"
- N: 8' 7"
- O: 12 7/8"
- P: 8' 7"

L LEE CONSTRUCTION SOLUT

Floor Plan Diagrams

Prepared: March 27, 2026

First Floor Plan (scaled from provided dimensions)

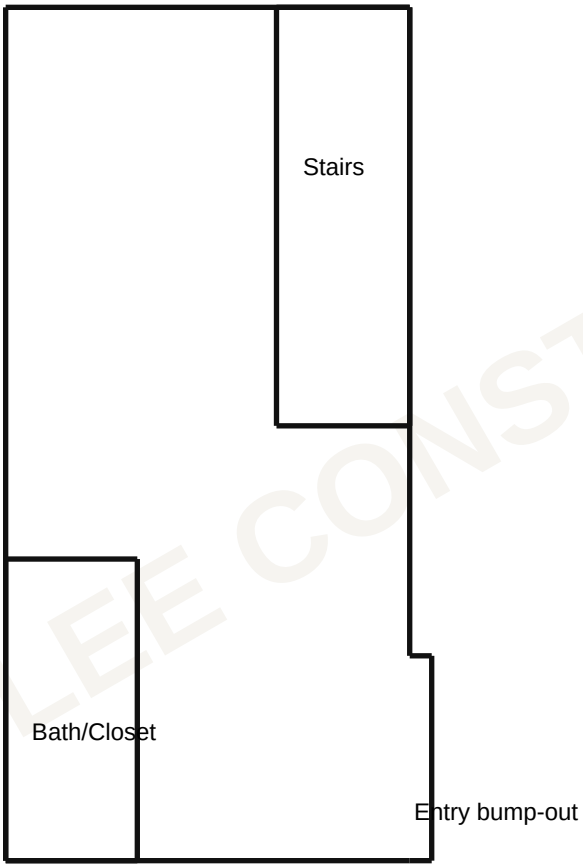

Doors: 3 (1 entry + 2 sliding plastic doorways indicated on sketch).

ROYAL LEE CONSTRUCTION SOLUTIONS

Second Floor Plan (scaled from provided dimensions)

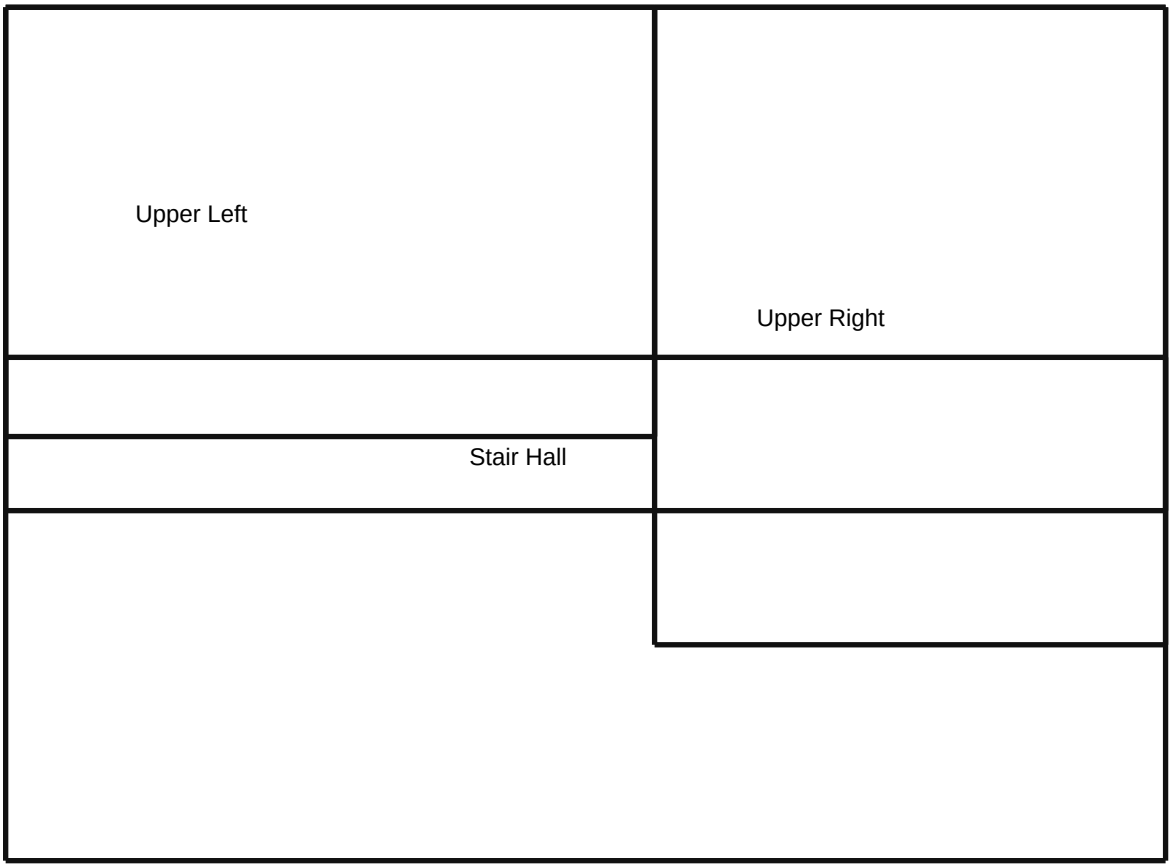

Doorways: 1 near stairwell + 1 sliding plastic doorway (per sketch).

Material Takeoff Summary

Prepared: March 27, 2026

Materials (Key Items)

Use this as an owner-review draft and confirm the final cart against current Menards store pricing before issue.

5/8 in. x 4 ft. x 8 ft. Type X gypsum board | Qty 140 sheets | $19.98
2 ft. x 4 ft. acoustic ceiling tiles (64 sq ft/case) | Qty 11 cases | $59.88
Main tee 12 ft (ceil grid) | Qty 19 pieces | $15.54
Cross tee 4 ft | Qty 52 pieces | $4.78
Cross tee 2 ft (case of 60) | Qty 1 cases | $141.0
Wall angle 12 ft | Qty 13 pieces | $10.25
12-gauge hanger wire 12 ft | Qty 64 pieces | $2.2
All-purpose joint compound, 4.5 gal | Qty 9 buckets | $74.99
Paper joint tape 2" x 500 ft | Qty 4 rolls | $15.48
10 ft metal corner bead | Qty 15 pieces | $3.19
1-5/8 in. drywall screws (5 lb) | Qty 5 boxes | $27.99
4 in. vinyl cove base (120 ft/case) | Qty 4 cases | $85.57
Wall base adhesive (1 gal) | Qty 1 gallons | $32.99
Interior paint, 5 gal, eggshell | Qty 5 buckets | $158.0
Interior primer, 5 gal | Qty 3 buckets | $158.0
Self-leveling cross-line laser (40 ft) | Qty 1 each | $119.0
Zip wall dust barrier kit | Qty 2 kits | $52.98
Construction dumpster allowance | Qty 1 allowance | $450.0

L LEE CONSTRUCTION SOLUT

Bid Summary

Prepared: March 27, 2026

Bid Summary (Labor Reduced by 2/3)

Materials Total: $7653.61
Labor (Reduced by 2/3): $2168.52
Insurance Fee: $300.00
Subtotal: $10122.13
Overhead (8%): $809.77
Total Bid: $10931.90

L LEE CONSTRUCTION SOLUT

Contract Draft

Prepared: March 27, 2026

CONSTRUCTION AGREEMENT (DRAFT)
Parties: Royal Lee Construction Solutions LLC ("Contractor") and Steven Bunch ("Owner")
Project Address: 522 Vermont St, Quincy, IL

Scope: Demo and replacement of interior drywall, 2x4 drop ceiling grid, ceiling tiles, baseboard, and repainting as outlined in the attached takeoff and material list.

Price: See attached bid summary.
Schedule: Work to begin upon permit approval and material delivery.
Payment: 50% deposit to secure materials, 40% progress payment, 10% upon completion.

Warranty: See attached 20-year workmanship certificate for covered scope.
Exclusions: Unforeseen structural issues, electrical/plumbing rework unless written change order.
Compliance: Work performed to current code requirements and AHJ directives.

Signatures:
Contractor Representative: _____ Date: _____
Owner: _____ Date: _____

L LEE CONSTRUCTION SOLUT

Warranty Certificate

Prepared: March 27, 2026

Royal Lee Construction Solutions

CERTIFICATE OF WORKMANSHIP - 20 YEAR GUARANTEE

Customer: Steven Bunch
Jobsite: 522 Vermont St, Quincy, IL

Royal Lee Construction Solutions LLC guarantees, for a period of twenty (20) years from completion, to repair or replace holes and workmanship discrepancies directly related to the drywall, ceiling grid, baseboard, and paint scope delivered under this agreement.

This certificate applies only to the scope of work performed by Royal Lee Construction Solutions LLC.

AL LEE CONSTRUCTION SOLUT

Permit Application Draft

Prepared: March 27, 2026

CITY OF QUINCY, ILLINOIS - PERMIT APPLICATION DRAFT (NOT OFFICIAL)
Applicant/Contractor: Royal Lee Construction Solutions LLC
Address: 3930 New London Gravel Rd, Hannibal, MO 63401
Phone: 217-257-6222
Email: rlcsolutions@proton.me
License: Hannibal, MO General Contracting License #7411
MO Registration: LC014481759

Owner: Steven Bunch
Jobsite Address: 522 Vermont St, Quincy, IL

Scope of Work: Interior demolition and replacement of drywall, drop ceiling grid, baseboard, repaint, and debris haul-off. No structural modifications proposed. All work to comply with AHJ requirements.

Estimated Project Value: $10,931.90

NOTE: This is a draft application for owner review. Official permits must be issued by the City of Quincy Building & Inspection Department.

L LEE CONSTRUCTION SOLUT