

Royal Lee Construction Solutions | Office Renovation Pack

Prepared: May 21, 2026



Project: Active Office Renovation Scope

Jobsite: To be confirmed before publication

Scope: Demo + replace drywall, ceiling grid, base, repaint

Note: This package is based on provided sketches and measurements.

Pricing basis: Existing material stock retained from the prior package, with only missing allowances added.

Floor Area Summary

First Floor: 383.9 sq ft

Second Floor: 263.3 sq ft

Total: 647.2 sq ft

Dimension Schedule (Owner Provided)

First Floor

A: 13' 4 3/4" (overall interior width)

B: 28' 3 1/2"

C: 8' 4"

D: 10' 0"

E: 14' 4 7/8"

F: 6' 9 1/2"

G: 8 3/4" (bump-out)

H: 13' 10 1/2"

I: 12' 11 1/2"

Second Floor

A: 13' 11"

B: 10' 4 3/4"

C: 8' 4"

D: 10' 7"

E: 7' 0"

F: 9' 7 1/4"

G: 16 3/8"

H: 11' 1 3/8"

I: 9' 4"

J: 13' 8 1/2"

K: 11' 11"

L: 12' 0"

M: 13' 8 1/4"

N: 8' 7"

O: 12 7/8"


P: 8' 7"

Floor Plan Diagrams

Prepared: May 21, 2026




First Floor Plan (scaled from provided dimensions)

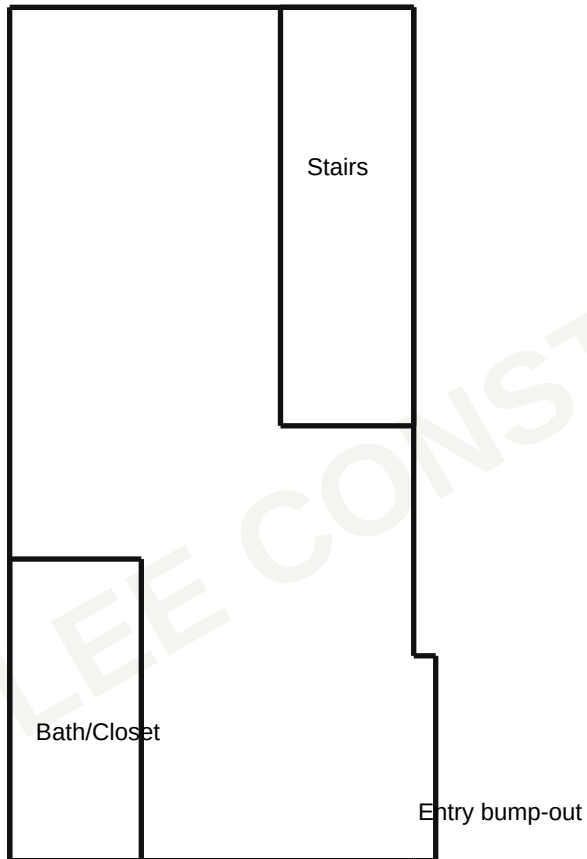

Doors: 3 (1 entry + 2 sliding plastic doorways indicated on sketch).

Second Floor Plan (scaled from provided dimensions)

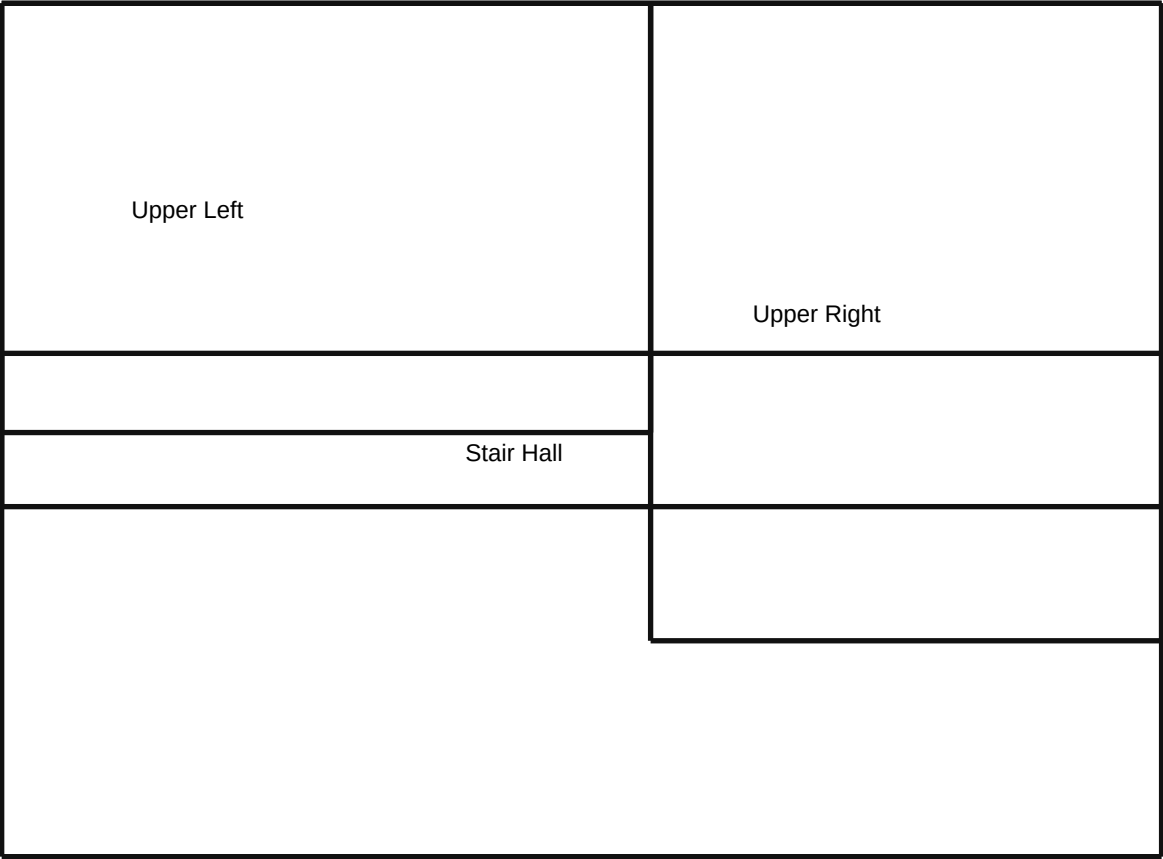

Doorways: 1 near stairwell + 1 sliding plastic doorway (per sketch).

Material Takeoff Summary

Prepared: May 21, 2026



Materials (Key Items)

Use this as an owner-review draft and confirm the final cart against current Menards store pricing before issue.

5/8 in. x 4 ft. x 8 ft. Type X gypsum board | Qty 140 sheets | \$19.98
2 ft. x 4 ft. acoustic ceiling tiles (64 sq ft/case) | Qty 11 cases | \$59.88
Main tee 12 ft (ceil grid) | Qty 19 pieces | \$15.54
Cross tee 4 ft | Qty 52 pieces | \$4.78
Cross tee 2 ft (case of 60) | Qty 1 cases | \$141.0
Wall angle 12 ft | Qty 13 pieces | \$10.25
12-gauge hanger wire 12 ft | Qty 64 pieces | \$2.2
All-purpose joint compound, 4.5 gal | Qty 9 buckets | \$74.99
Paper joint tape 2" x 500 ft | Qty 4 rolls | \$15.48
10 ft metal corner bead | Qty 15 pieces | \$3.19
1-5/8 in. drywall screws (5 lb) | Qty 5 boxes | \$27.99
4 in. vinyl cove base (120 ft/case) | Qty 4 cases | \$85.57
Wall base adhesive (1 gal) | Qty 1 gallons | \$32.99
Interior paint, 5 gal, eggshell | Qty 5 buckets | \$158.0
Interior primer, 5 gal | Qty 3 buckets | \$158.0
Self-leveling cross-line laser (40 ft) | Qty 1 each | \$119.0
Zip wall dust barrier kit | Qty 2 kits | \$52.98
Construction dumpster allowance | Qty 1 allowance | \$450.0

Bid Summary

Prepared: May 21, 2026



Bid Summary (Labor Reduced by 2/3)

Materials Total: \$7653.61

Labor (Reduced by 2/3): \$2168.52

Insurance Fee: \$300.00

Subtotal: \$10122.13

Overhead (8%): \$809.77

Total Bid: \$10931.90

ROYAL LEE CONSTRUCTION SOLUTIONS

Contract Draft

Prepared: May 21, 2026



CONSTRUCTION AGREEMENT (DRAFT)

Parties: Royal Lee Construction Solutions LLC ("Contractor") and the confirmed project owner ("Owner")

Project Address: To be confirmed before publication

Scope: Demo and replacement of interior drywall, 2x4 drop ceiling grid, ceiling tiles, baseboard, and repainting as outlined in the attached takeoff and material list.

Price: See attached bid summary.

Schedule: Work to begin upon permit approval and material delivery.

Payment: 50% deposit to secure materials, 40% progress payment, 10% upon completion.

Warranty: See attached 20-year workmanship certificate for covered scope.

Exclusions: Unforeseen structural issues, electrical/plumbing rework unless written change order.

Compliance: Work performed to current code requirements and AHJ directives.

Signatures:

Contractor Representative: _____ Date: _____

Owner: _____ Date: _____

Warranty Certificate

Prepared: May 21, 2026



Royal Lee Construction Solutions

CERTIFICATE OF WORKMANSHIP - 20 YEAR GUARANTEE

Customer: To be confirmed before publication

Jobsite: To be confirmed before publication

Royal Lee Construction Solutions LLC guarantees, for a period of twenty (20) years from completion, to repair or replace holes and workmanship discrepancies directly related to the drywall, ceiling grid, baseboard, and paint scope delivered under this agreement.

This certificate applies only to the scope of work performed by Royal Lee Construction Solutions LLC.

Permit Application Draft

Prepared: May 21, 2026



CITY OF QUINCY, ILLINOIS - PERMIT APPLICATION DRAFT (NOT OFFICIAL)

Applicant/Contractor: Royal Lee Construction Solutions LLC

Address: 3930 New London Gravel Rd, Hannibal, MO 63401

Phone: 217-257-6222

Email: rlc-solutions@proton.me

License: Hannibal, MO General Contracting License #7411

MO Registration: LC014481759

Owner: To be confirmed before publication

Jobsite Address: To be confirmed before publication

Scope of Work: Interior demolition and replacement of drywall, drop ceiling grid, baseboard, repaint, and debris haul-off. No structural modifications proposed. All work to comply with AHJ requirements.

Estimated Project Value: \$10,931.90

NOTE: This is a draft application for owner review. Official permits must be issued by the City of Quincy Building & Inspection Department.